



## TT317 IGX Thor Controller

### For Industrial and Robotics Applications

#### Key Features

- ▶ IGX Thor AI Performance
- ▶ zQSFP+ 4x 25G Ethernet
- ▶ RJ-45 1G Ethernet
- ▶ M.2 Expansion Interfaces
- ▶ SE050 TPM
- ▶ FSI in SoC
- ▶ Safety MCU
- ▶ Universal Flash Storage (UFS)

#### Applications

- ▶ Autonomous Transportation
- ▶ Medical
- ▶ Robotics
- ▶ Agriculture
- ▶ Mining
- ▶ UAV

#### Overview

The TT317 IGX Thor Controller is an industrial, IP20 compute platform based on the powerful NVIDIA® Jetson IGX T5000™ module, which integrates a 14-core ARM Poseidon-AE 64-bit CPU, an NVIDIA Blackwell Architecture GPU with 2560 CUDA® cores, 96 4th Gen Tensor Cores, and 128GB LPDDR5x DRAM running at 4266 MHz with 273 GB/s bandwidth. Designed for industrial, medical, and commercial deployment.

The TT317 delivers up to 2100 FP4 TFLOPs of AI compute, providing the performance needed for edge inference and real-time video analytics. It offers a comprehensive set of latest-generation interfaces on the Jetson IGX T5000, including a zQSFP+ interface, RJ-45 GbE interface, USB Type-C for KVM Interface, 8x protected Discrete IOs, 2x isolated CAN bus ports, M.2 M-Key Slot (PCIe x4), M.2 B-Key Slot (USB 2.0 and USB 3.2), M.2 E-Key Slot (PCIe x1 and USB 2.0), and USB 2.0. The zQSFP+ interface delivers high-performance, high-speed data transmission at up to 100 Gb/s, enabling the transfer of large amount of data with minimal latency.


The dedicated Functional Safety Island (FSI) in SoC is a redundant processor that, in pair with the Safety MCU, monitors and handles safety-critical workloads. This architecture facilitates compliance with strict industrial and medical safety standards. Additionally, the integrated UFS provides high-speed, reliable onboard storage to support rapid boot times and mission-critical data logging.

#### Key Advantages

- ▶ Powered by NVIDIA Jetson IGX T5000 Thor
- ▶ NVIDIA Blackwell GPU with 2560 CUDA® cores and 96 4th Gen Tensor Cores
- ▶ 14-core Arm® Poseidon-AE CPU with 4MB shared L3 Cache
- ▶ 3x M.2 Expansion Slots for LTE/5G, Wi-Fi/BT and Storage
- ▶ SE050 Secure Element for Secure AI & IoT Operations
- ▶ Functional Safety Island (FSI) in SoC and Safety MCU



## Block Diagram

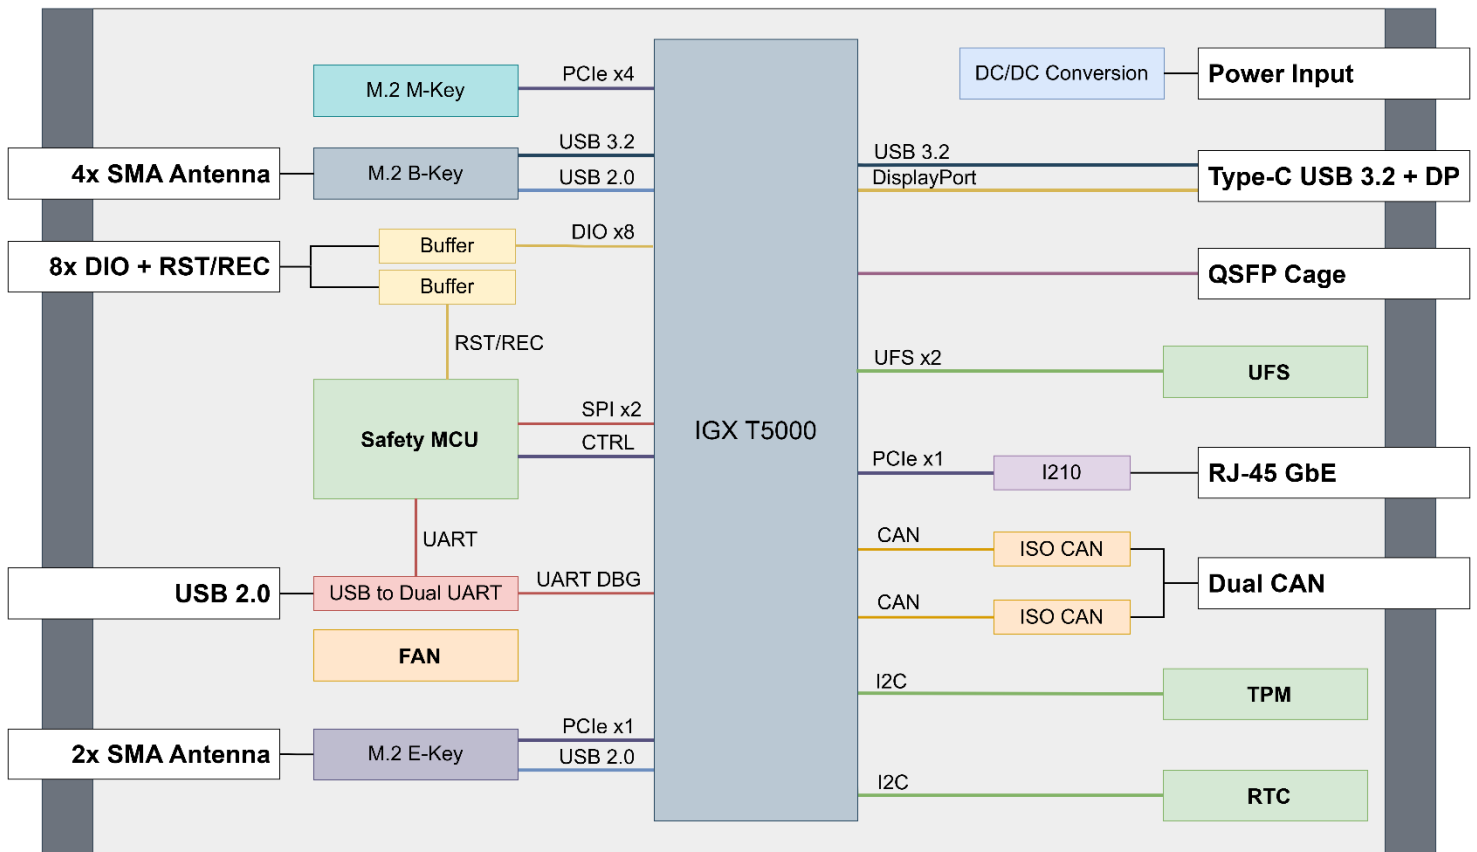

## Specifications

SOM	NVIDIA® Jetson IGX T5000 up to 2070 FP4 TFLOPS
SYSTEM MEMORY	128GB LPDDR5x 4266MHz 256-bit, 273GB/s
DISPLAY INTERFACE	USB Type-C Display Port
ETHERNET	4x 25GbE LAN zQSPF+ Interface RJ-45 GbE Port
I/O	USB 3.2 Type-C + DP 8x Protected Discrete I/O 2x isolated CAN 2.0
EXPANSION	1x M.2 PCIe Slot M-Key PCIe x4 (for NVMe SSD) 1x M.2 PCIe Slot E-Key PCIe x1 (for Wi-Fi/BT) 1x M.2 PCIe Slot B-Key (for LTE/5G)
ADDITIONAL FEATURES	SE050 TPM RTC microUSB Serial Console Output (sMCU and SOM)
SAFETY	Functional Safety Island (FSI) in SoC Safety MCU Universal Flash Storage (UFS)
OS SUPPORT	Ubuntu 24.04
POWER	12V DC input Maximum 180W total power budget
DIMENSION	163 mm (W) x 155 mm (D) x 70 mm (H)

## Environmental

OPERATING TEMPERATURE	-20°C to 60°C
STORAGE TEMPERATURE	-40°C to 85°C
HUMIDITY	10% to 90%, non-condensing
VIBRATION	Operating, MIL-STD-810H, Method 514.8, Category 4
SHOCK	Operating, MIL-STD-810H, Method 516.8, Procedure I
EMC	Designed to meet FCC, CE, and UL certifications, where applicable

## Ordering Options

Part Number	Description
TT317-100-000-000	TT317 with NVIDIA Jetson IGX Thor T5000 128GB

The system can be customized for specific customer requirements, contact Tauro Technologies sales for details.



9205 W. Russell Rd., Ste 240  
Las Vegas, NV 89148  
taurotech.com

Phone: +1 (725) 220-6100  
Email: sales@taurotech.com



Visit Our Website